


225-HEF-A4Z



225-HEF-A4Z

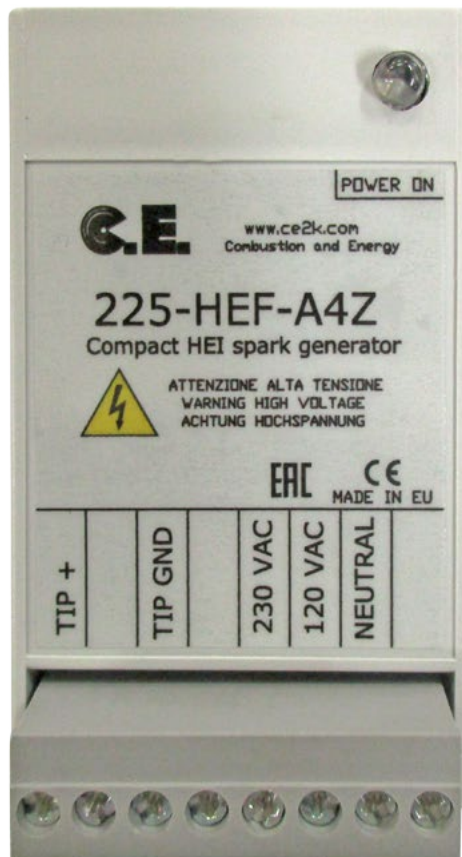

HIGH ENERGY IGNITION MODULE

225-HEF-A4Z

KEY FEATURES

- High energy ignition module
- Small dimensions
- Degree of protection: IP20
- Power discharge: 4J
- Output volt.: 1kV impulsive capacity discharge
- Discharge frequency: fixed (approx. 1 p.p.s.)
- Installation type: for DIN bar
- Power supply: 120VAC or 230VAC 50Hz/60Hz

MECHANICAL FEATURES

- Electronic circuits
- Operating temp. range: -40°C to +85°C
- Dimensions: 45x75x110mm
- Unit weight: 400g
- Enclosure: PVC
- Connections: screw terminals

ELECTRICAL FEATURES

- Nominal operating voltage: 1000V
- Consumption: less than 300mA
- Power loss: 5W

ACCESSORIES / OPTIONS

- High Energy Ignition Probe 200-HEF-5AA
- Inside control panel for hazardous area application

INSTALLATION

- Inside control local panel

APPLY TO

- Flares
- Boilers

INTERNATIONAL REGULATION

- CE marking
- EAC marking for Russian market

MANUFACTURER

Combustion and Energy Srl
Part number: 225-HEF-A4Z

